


## PNEUMATIC TUBE ROLLING DRIVES

### FOR HEAT EXCHANGERS



Model No.	Tube Capacity (inch)	Max Torque Nm	Weight (kg)
T720 - 550	1/2	8.47	1.20
T850 - 1250	3/4	12.20	4.80
T850 - 600	1	21.81	4.80
T850 - 400	1.1/4	36.00	4.80

### FOR BOILERS

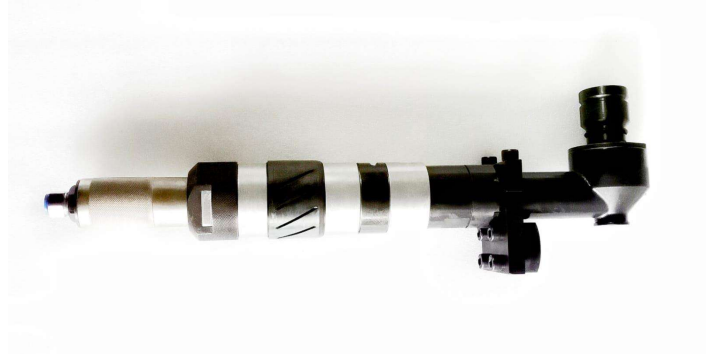

Model No.	Tube Capacity (inch)	Max Torque Nm	Weight (kg)
T72 - RT -190	2.5	190	5.80
T72 - RT - 90	4	410	6.70

## ERGONOMIC TOOL HOLDING SYSTEM



Most reliable and proven ergo design, work holding system suitable for every application of tube installation and tube removal.

Tool holding system operates on air pressure of 6 bar. This system is very portable and can be used to hold most of the tools and drives required for tube expansion, facing and tube removing operations.

### TECHNICAL SPECIFICATION

Model No.	Vertical Movement	Horizontal Movement	Lift capacity	Allowable Torque
TAS - 35	3 Feet (915mm)	5 Feet (1524mm)	35 Kgs.	170NM
TAS - 55	5 Feet (1524mm)	5 Feet (1524mm)	35 kgs.	170NM